

HALF-BRICK DC-DC CONVERTER

**2:1 WIDE INPUT RANGE
UP TO 255Watts**



FEATURES

- NO MINIMUM LOAD REQUIRED
- 2250VDC INPUT TO OUTPUT BASIC INSULATION
- UL60950-1, EN60950-1, & IEC60950-1 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT

2250VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	OTP	SYNC
--------------------------	-----------------------	------------	------------	------------	------------	------------	-------------

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @ Full Load A	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load µF
PD200-12S3P3	9 ~ 22	3.3	50	25	87	151000
PD200-12S05	9 ~ 22	5	36	90	90	72000
PD200-12S12	8.5 ~ 22	12	15	90	90	12500
PD200-12S15	8.5 ~ 22	15	12	55	90	8000
PD200-12S24	8.5 ~ 22	24	7.5	70	90	3100
PD200-12S28	8.5 ~ 22	28	6.5	55	90	2300
PD200-12S48	8.5 ~ 22	48	3.7	75	89	770
PD200-24S3P3	16.5 ~ 36	3.3	50	20	88	151000
PD200-24S05	16.5 ~ 36	5	40	35	91	80000
PD200-24S12	16.5 ~ 36	12	18	45	91	15000
PD200-24S15	16.5 ~ 36	15	15	45	91	10000
PD200-24S24	16.5 ~ 36	24	9	40	93	3700
PD200-24S28	16.5 ~ 36	28	7.5	50	93	2600
PD200-24S48	16.5 ~ 36	48	4.5	50	91	930
PD200-48S3P3	33 ~ 75	3.3	60	20	90	181000
PD200-48S05	33 ~ 75	5	46	20	91	92000
PD200-48S12	33 ~ 75	12	21	25	91	17500

PD200-48S15	33 ~ 75	15	17	25	93	11300
PD200-48S24	33 ~ 75	24	10.5	25	92	4300
PD200-48S28	33 ~ 75	28	9	25	92	3200
PD200-48S48	33 ~ 75	48	5.2	25	92	1000
PD200-48S53	33 ~ 75	53	4.7	25	92	880

PART NUMBER STRUCTURE

PD200 -	48	S	05 -	P	Y	C	TH	HS
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Ctrl and Pin Options	SYNC Option	CASE pin Option	Through hole type ⁽¹⁾	Assembly Option
	12:9~22 8.5~22 24:16.5~36 48:33~75	S:Single	3P3:3.3 05:5 12:12 15:15 24:24 28:28 48:48 53:53	<input type="checkbox"/> :Negative logic, 0.200" pin length L:Negative logic, 0.145" pin length P:Positive logic, 0.200" pin length S:Positive logic, 0.145" pin length	<input type="checkbox"/> :No pin Y:SYNC	<input type="checkbox"/> :No pin C:CASE pin	<input type="checkbox"/> : Thread TH: No thread	<input type="checkbox"/> : None Heat-sink type: HS: Height H=0.45" vertical fin, 7G-0021A-F HS1: Height H=0.24" horizontal fin, 7G-0022A-F HS2: Height H=0.24" vertical fin, 7G-0023A-F HS3: Height H=0.45" horizontal fin, 7G-0024A-F Terminal block type⁽²⁾: T: Wall mounted TF: Wall mounted with EMC filter ⁽³⁾ TF1: Wall mounted with EMC filter can be connected to PE ⁽³⁾

(1) The module can't equip Heat-sink with TH option.

(2) No Y and C function for terminal block type, and terminal block type only for 0.200" pin length.

(3) EMI filter meet EN55022 Class A.

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	12Vin(nom)	9	12	22	VDC
	3.3 & 5Vout Others	8.5	12	22	
	24Vin(nom)	16.5	24	36	
	48Vin(nom)	33	48	75	
Start up voltage	12Vin(nom)			9	VDC
	24Vin(nom)			18	
	48Vin(nom)			34	
Shutdown voltage	12Vin(nom)	7.3		8.1	VDC
	24Vin(nom)	15.5		16.3	
	48Vin(nom)	31.6		32.5	
Start up time	Constant resistive load Power up Remote ON/OFF		75		ms
			75		
Input surge voltage	1 second, max.	12Vin(nom)		30	
		24Vin(nom)		50	
		48Vin(nom)		100	
Input filter ⁽¹⁾			Pi type		
Remote ON/OFF	Referred to -Vin pin Negative logic DC-DC ON (Standard) DC-DC OFF Positive Logic DC-DC ON (Option) DC-DC OFF Input Current of Ctrl pin Remote off input current			Short or 0 ~ 1.2VDC Open or 3 ~ 12 VDC Open or 3 ~ 12 VDC Short or 0 ~ 1.2VDC	
		-0.5		1	mA
			3		mA

Sync pin signal ⁽²⁾		-0.3	5.6	VDC
--------------------------------	--	------	-----	-----

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.1		+0.1	%
Load regulation	No Load to Full Load	-0.1		+0.1	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense	-20		+10	%
Remote sense	% of Vout(nom) If remote sense is not being used, Sense pins should be connected to corresponding polarity OUTPUT pins.			10	%
Ripple and noise	Measured by 20MHz bandwidth With a 1 μ F/25V X7R MLCC and a 22 μ F/25V POS-CAP With a 1 μ F/25V X7R MLCC and a 22 μ F/25V POS-CAP With a 4.7 μ F/50V X7R MLCC With a 2.2 μ F/100V X7R MLCC		75 100 200 300		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		200	250	μ s
Over voltage protection	% of Vout(nom); Hiccup mode	115		130	%
Over load protection	% of Iout rated; Hiccup mode	120		150	%
Short circuit protection		Continuous, automatic recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Basic insulation) Input to Output Input (Output) to Case	2250 1600			VDC
Isolation resistance	500VDC	1			G Ω
Isolation capacitance				2500	pF
Switching frequency		225	250	275	kHz
Safety approvals					UL60950-1 EN60950-1 IEC60950-1
Case material					Metal
Base material					FR4 PCB
Potting material					Silicone (UL94 V-0)
Weight	Module stand alone PD200-xxSxx - T PD200-xxSxx - TF PD200-xxSxx - TF1			105g (3.70oz) 235g (8.29oz) 280g (9.88oz) 287g (10.12oz)	
MTBF	MIL-HDBK-217F, Full load				3.182x10 ⁵ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
-----------	------------	------	------	------	------

Operating case temperature		-40	+115	°C
Over temperature protection			+120	°C
Storage temperature range	Terminal block type	-40	+105	°C
	Others	-55	+125	
Thermal impedance ⁽³⁾	Vertical direction by natural convection (20LFM) Module without assembly option Only mount on the iron base-plate Heat-sink type with 0.24" Height Heat-sink type with 0.45" Height		6.1 2.8 5.1 4.6	°C/W
Thermal shock				MIL-STD-810F
Vibration				MIL-STD-810F
Relative humidity				5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions		Level
EMI ⁽⁴⁾	EN55022		Class A
			Class B
ESD	EN61000-4-2	Air ±8kV and Contact ±6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	20V/m	Perf. Criteria A
Fast transient ⁽⁵⁾	EN61000-4-4	±2kV	Perf. Criteria A
Surge ⁽⁵⁾	EN61000-4-5	EN55024 ±2kV	Perf. Criteria A
Conducted immunity	EN61000-4-6	10Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

Note:


- Input source impedance: The power modules will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module.
Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor.
Recommended Nippon Chemi-con KY series, 100µF/100V.
- (1) Multiple PD200 series module can be synchronized together simply by connecting Sync pins together. Care should be taken to ensure the ground potential differences between modules are minimized.
(2) In this configuration all of the modules will be synchronized to the highest frequency module.
(3) Up to three modules can be synchronized using this technique.
(4) More relevant information in datasheet.
- (1) Thermal test condition with vertical direction by natural convection (20LFM).
(2) The iron base-plate dimension is 19" X 3.5" X 0.063" (The height is EIA standard 2U).
(3) The heat-sink is optional and P/N: 7G-0021A-F , 7G-0022A-F , 7G-0023A-F , 7G-0024A-F. Please refer to heat-sink selection guide.
- The PD200 series standard module meets EN55022 Class A and Class B with external components.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
Recommended 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220µF/100V) to connect in parallel.
- CASE GROUNDING : Connecting four screw bolts to shield plane will help to reduce the EMI.
- For further information, please contact with MEGA.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

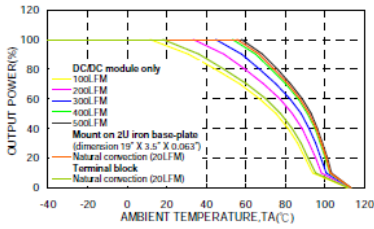


PD200-48S05 Derating Curve (Note 3)

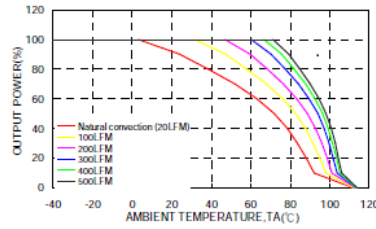


PD200-48S05 Derating Curve (Note 3)
With 0.24" Height Heat-sink

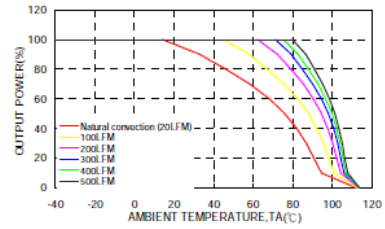

PD200-48S05 Derating Curve (Note 3)
With 0.45" Height Heat-sink

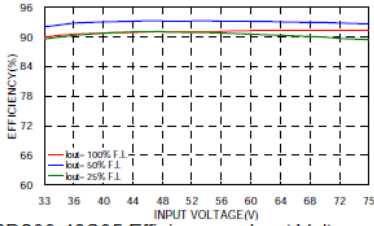


PD200-48S05 Efficiency vs. Input Voltage

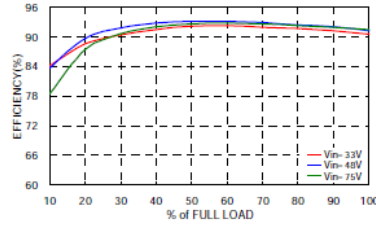

PD200-48S05 Efficiency vs. Output Load

MECHANICAL DRAWING

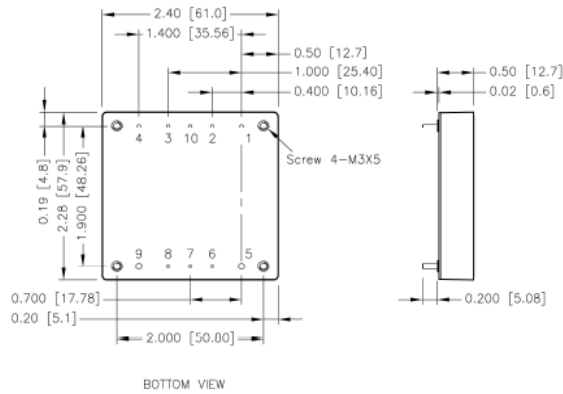


PIN CONNECTION

PIN	DEFINE	DIAMETER
1	-Vin	0.04 Inch
2	Case (option)	0.04 Inch
3	Ctrl	0.04 Inch
4	+Vin	0.04 Inch
5	-Vout	0.08 Inch
6	-Sense	0.04 Inch
7	Trim	0.04 Inch
8	+Sense	0.04 Inch
9	+Vout	0.08 Inch
10	Sync (option)	0.04 Inch

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.




$$R_U = \left(\frac{V_{OUT} (100 + \Delta\%)}{1.225 \Delta\%} - \frac{(100 + 2 \Delta\%)}{\Delta\%} \right) k\Omega$$

$$R_D = \left(\frac{100}{\Delta\%} - 2 \right) k\Omega$$


1. All dimensions in inch (mm)
2. Tolerance : x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)
5. Mounting screws should always be used.
6. The screw locked torque:
MAX 5.0kgf-cm(0.49N-m)

HEAT-SINK TYPE OPTIONS

Vertical Fin Orientation, Suffix:-HS, -HS2

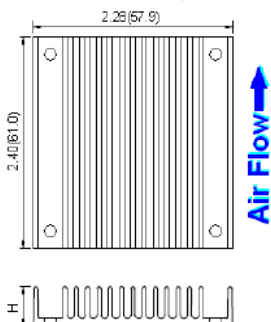

Horizontal Fin Orientation, Suffix:-HS1, -HS3

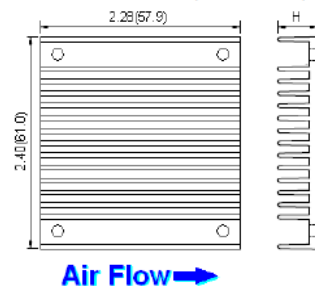


HS:	Height H=0.45" vertical fin, 7G-0021A-F
HS1:	Height H=0.24" horizontal fin, 7G-0022A-F
HS2:	Height H=0.24" vertical fin, 7G-0023A-F
HS3:	Height H=0.45" horizontal fin, 7G-0024A-F

1. All dimensions in inch (mm)
2. Tolerance : x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)

TERMINAL BLOCK TYPE OPTION

PD200-xxSxx-T

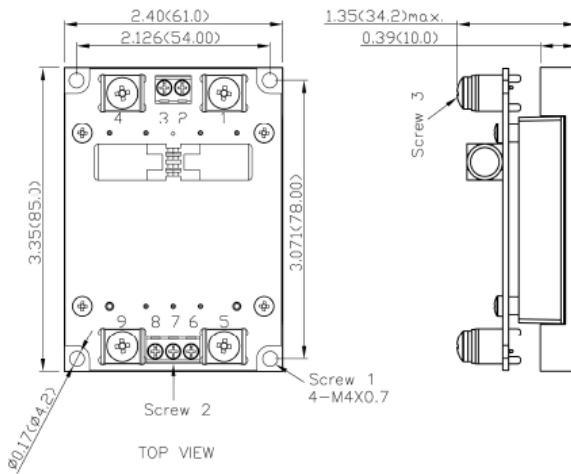


TERMINAL CONNECTION


NO.	DEFINE
1	-Vin
2	NC
3	Ctrl
4	+Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.



PD200-xxSxx-TF

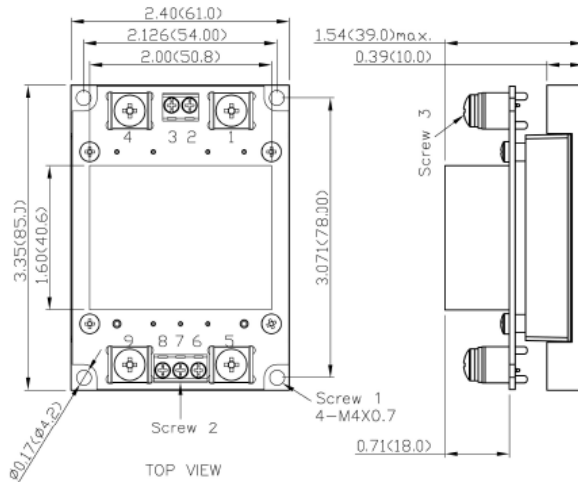

$$R_U = \left(\frac{V_{OUT} (100 + \Delta\%)}{1.225 \Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right) k\Omega$$

$$R_D = \left(\frac{100}{\Delta\%} - 2 \right) k\Omega$$

1. All dimensions in inch (mm)
2. Tolerance : x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)
3. Screw 1 locked torque:
MAX 11.2kgf-cm/ 1.10N-m
4. Screw 2 locked torque:
MAX 5.2kgf-cm/ 0.51N-m
5. Screw 3 locked torque:
MAX 16.8kgf-cm/ 1.65N-m

PD200-xxSxx-TF1

