


Guards against accidental disconnection of Computers, PDU's, Servers and most Network Devices.



Unique patented lockable female C13 & C19 IEC connectors and outlets

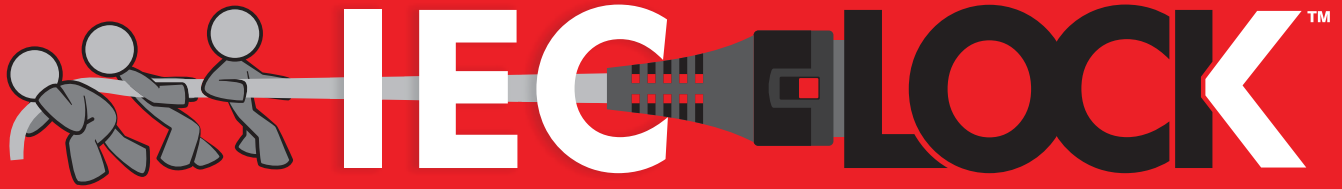

Data Centers

Suitable for use with 'ANY STANDARD' C14 or C20 inlet

- Protects appliances that are vulnerable to vibration
- Connector cannot be accidentally pulled or vibrated out of the inlet



Outside Broadcasting



Medical



Military



Maritime



Connectors and outlets can be used with standard IEC plugs and inlets.

For extra protection, use both to ensure against accidental removal of power cables connected to PDU's, Servers, Network devices etc.



# How it works!



- Push the connector into the standard IEC inlet and it is locked in position
- Connector CANNOT be accidentally pulled or vibrated out of the inlet
- Slide back the 'red' tab to release and remove connector from inlet



## Technical Information

### Cable Assemblies (Connector)

- IEC LOCK (C13/C19) to UK Plug
- IEC LOCK (C13/C19) to European Schuko Plug
- IEC LOCK (C13/C19) to (C14/C20) IEC Plug
- IEC LOCK (C13/C19) to NEMA 5-15P (USA)
- IEC LOCK (C13/C19) to Australian 3 Pin Plug
- IEC LOCK (C13/C19) to Swiss & Italian Plug
- IEC LOCK (C13) to Japanese Plug
- IEC LOCK (C13/C19) to Brazilian Plug
- IEC LOCK (C13/C19) to Stripped End

### Cable Lengths (Connector)

300mm up to any length. Various cables lengths and assemblies are retained as stock items with further combinations being available for special order. Call our Sales Office for more information.

### Patent Information (Connector)

Patents: EU Patent No. EP1459412B1  
International Patent application  
No. PCT/GB02/05714

### Test Information (Connector)

Test Body: KEMA, UL, c-UL, SAA, KC, PSE  
Test Standard: IEC/EN 60320-1  
H05V V-F: EN 50525-2-11:2011

### Cable Size (Connector)

C13: 3 x 1.00mm<sup>2</sup> H05 V V-F / H05RN  
C13: 3 x 16 / 18awg SVT / SJT  
C13: 3 x 1.25mm<sup>2</sup> HVCTF  
C19: 3 x 1.50mm<sup>2</sup> H05VV-F,  
C19: 3 x 14 awg SVT / SJT  
Cable colours available: Black, Orange, Blue, Red & White

### Approvals (Outlet)

10 A/250VAC: ENEC 05, KEMA KEUR  
15 A/250VAC: UL

### Patent (Outlet)

UK Number: 2463468B EU Number: EP2321879A  
HK Number: HK1141901 Chinese Patent  
Application No: CN 102150330 A  
Other worldwide patents pending

### Standards (Outlet)

IEC/EN 60320-2-2/FUL498  
CSA C22.2 No 182.3-M1987

MEGA Electronics Inc

732-249-2656

sales@megaelectronics.com

4-B Jules  
New Brunswick, NJ 08901

www.megaelectronics.com